QUARTER TURN – SPRING CAM

160





RoHS













Cut Out

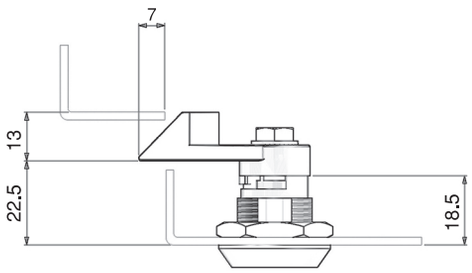





- Spring-loaded cam provides depress-to-lock action
- Distance between inside of lock face and front of cam fixed at 22.5 mm
- There is no IP 65 version of this lock,due to spring loaded cam


MATERIAL

HOUSING:	Zamak DIN-EN 1774-ZnAl4Cu1
DRIVER:	Zamak DIN-EN 1774-ZnAl4Cu11
GASKET:	Rubber

FINISH
Chrome







Position 1

Push the door


Position 2

Cam will move upright when touches the body

Position 3

When the cam is free, cam will move down right by spring and the door will lock

PRODUCT CODE

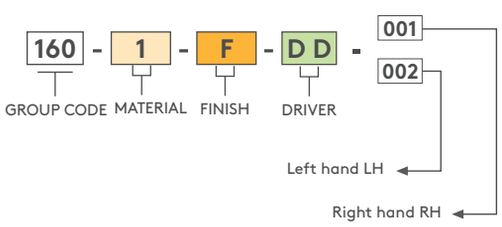

MATERIAL	M
Zamak	1

FINISH	F
Chrome	1
Black coated	2

For drivers please check page: 194

For keys please check pages : 189 - 191

tel | 0845 758 5070 fax | 0845 609 0049