HVAC HINGE (2D)

700




RoHS

2D


R

L

V : 1

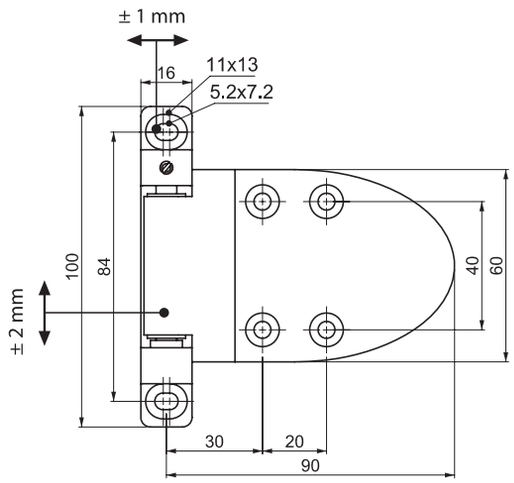


Spacer

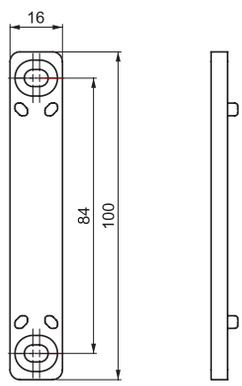

- Designed for plain, side-mounted doors
- For side-mounted doors with a bend of 2-12 mm
- Hinge supplied pre-assembled to decrease labour costs
- Two-dimensional door adjustments possible
- Axial adjustment is ± 2 mm. Radial adjustment is ± 1 mm

Spacer application
700 1-2-H-1

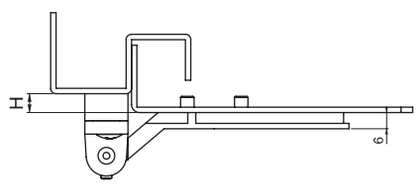


H
02
07
12


MATERIAL

BODY:	Zamak DIN-EN 1774-ZnAl4Cu1
PIN:	Steel
BEARING:	Delrin

FINISH
Black coated

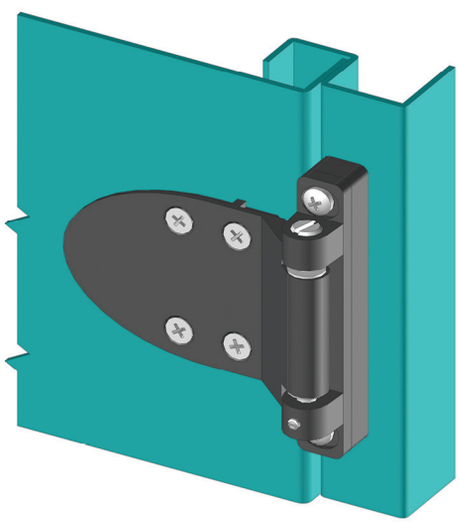


Hinge Rotation Angle



Note: Bolts are not supplied

PRODUCT CODE

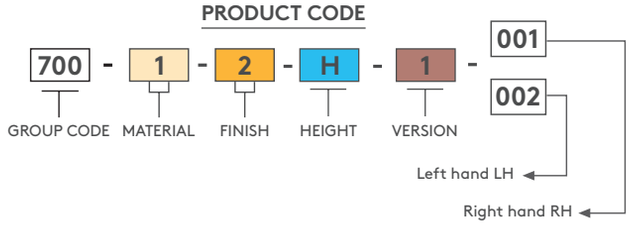

MATERIAL	M
Zamak	1

FINISH	F
Black coated	2

tel | 0845 758 5070 fax | 0845 609 0049